

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 0 980 792 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
23.02.2000 Bulletin 2000/08

(51) Int Cl.7: B60R 11/02, H04M 1/04

(21) Application number: 99306537.4

(22) Date of filing: 19.08.1999

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE
Designated Extension States:
AL LT LV MK RO SI

• Humphreys, Morris
Saginaw, TX 76179 (US)
• Leman, Ari
Euless, TX 76039 (US)

(30) Priority: 19.08.1998 US 136186


(71) Applicant: NOKIA MOBILE PHONES LTD.
02150 Espoo (FI)

(74) Representative: Jeffery, Kendra Louise et al
Nokia IPR Department,
Nokia House,
Summit Avenue
Southwood, Farnborough,
Hampshire GU14 0NZ (GB)

(72) Inventors:
• Lopez, Peter
The Colony, TX 75056 (US)

(54) Holder for mobile telephone

(57) A holder for a mobile telephone is disclosed. The holder has a securing mechanism that securely holds a mobile telephone within the holder and allows easy movement of the mobile telephone from and into a secure position within the holder. In an embodiment of the invention, the holder includes a cradle unit that has a securing mechanism including a securing pin flexibly formed on the top end of the cradle unit and a securing pocket formed on the bottom end of the cradle unit. A mobile telephone may be secured in the cradle by placing the bottom portion of the mobile telephone in the securing pocket and moving the mobile telephone into the cradle unit, allowing the securing pin to snap into a securing notch that is formed on the top portion of the mobile telephone. The cradle unit may be formed of a single piece body. The cradle unit may also be formed to encompass the mobile telephone to provide a better tactual grip than is provided by the body of the mobile telephone alone.

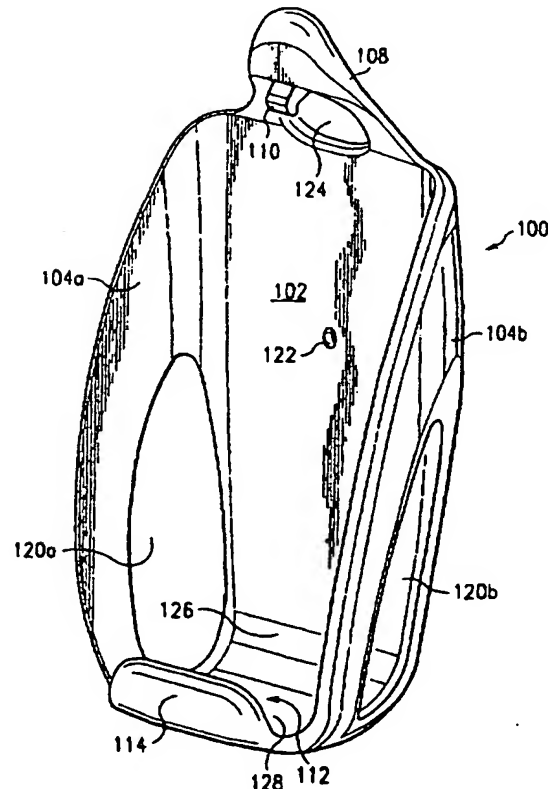FIG. 1

Description

[0001] This invention relates to mobile telephone holders and, more particularly, to a mobile telephone holder having a securing mechanism allowing easy movement of the mobile telephone from and into the holder, and easy use and handling of the mobile telephone while the mobile telephone is in the holder.

[0002] The types and numbers of mobile telephones in use worldwide are rapidly increasing. Average mobile telephone size is decreasing, and the variety of physical configurations of mobile telephones is increasing. The types of physical configurations currently available include pocket-sized phones that may be shaped like a conventional mobile phone or that may be implemented in an increasingly popular folding or clamshell type configuration.

[0003] As mobile telephones become smaller, handling of a telephone by a user may become difficult in certain circumstances. For example, the small size of a device, such as a palm-sized folding or clamshell type telephone, may make it difficult for a user to carry if no pocket is available, or if the telephone is held loosely in a pocket where it can move about or fall out. Additionally, trying to locate and accessing the telephone to make or receive a call may be difficult if it is necessary to locate and remove the phone from a pocket that is larger than the phone.

[0004] Securing a small sized device, such as the palm-sized folding or clamshell type telephone in a conventional type mobile telephone holder located in an automobile or on a belt clip, for example, may alleviate the problem of locating the device, but it may still be difficult to remove the device from the mobile telephone holder for use. Also, in certain situations, once the mobile telephone is removed from the holder or belt, the small size of the mobile telephone may be a hindrance to quick access to the mobile telephone and the mobile telephone keypad.

[0005] The present invention provides a holder for a mobile telephone, where the holder has a securing mechanism that securely holds a mobile telephone within the holder and allows easy movement of the mobile telephone from and into a secure position within the holder. The holder may be removably mounted on an object, permitting the user to transport the mobile telephone if desired. The securing mechanism is light and simple in construction, and a minimum number of parts are needed for implementing the mechanism. The holder may be formed from a single piece of material. The holder may be constructed in such a way as to facilitate locating and accessing a small sized mobile telephone and also allow use of a mobile telephone while the mobile telephone is secured in the holder. The holder may also serve the function of providing a user with a better-defined tactual grip on the mobile telephone than is obtained by holding the mobile telephone alone in the user's hand.

[0006] In an embodiment of the invention, the holder includes a cradle unit that has a securing mechanism including a securing pin flexibly formed on its top end and a securing pocket formed on its bottom end. A mobile telephone may be secured in the cradle by placing the bottom portion of the mobile telephone in the securing pocket and moving the mobile telephone into the cradle, allowing the securing pin to snap into a securing notch that is formed on the top portion of the mobile telephone. The cradle unit may include side portions that aid in guiding the mobile telephone into the securing pocket and also aid in securing the mobile telephone when the phone is secured in the holder. The securing pin and securing pocket are formed to allow use of the keypad and display of a mobile telephone while the telephone is secured in the cradle unit.

[0007] The cradle unit also encloses the mobile telephone to provide a better tactual grip on the mobile telephone through the larger holding surface of the cradle.

[0008] This facilitates quick access to and use of the mobile telephone. The cradle unit is configured so that the complete cradle may be formed from a single piece of material, such as plastic, minimizing the number of parts.

[0009] In the embodiment, the holder may also include a clip. The clip may be attached to the rear portion of the cradle unit and allow a user to attach the cradle to an object such as a belt or dashboard. When quick access to the mobile telephone is necessary, the mobile telephone and holder may be removed from the object that it is attached to, and the user may grip a complete assembly including the holder and the phone, and operate the phone having the benefit of the firm grip offered by the cradle unit.

[0010] A more complete understanding of the present invention may be had by reference to the following detailed description when read in conjunction with the accompanying drawings wherein:

FIG. 1 is a right front perspective view of the cradle unit of a mobile telephone holder according to an embodiment of the invention;

FIGs. 2A, 2B and 2C are front, right side and rear views, respectively, of the cradle unit of a mobile telephone holder according to an embodiment of the invention;

FIG. 3 is an exploded view of a mobile telephone and holder assembly according to an embodiment of the invention; and

FIGs. 4A, 4B, 4C and 4D are a first right front perspective view, a second right front perspective view, a right side view, and a third right front perspective view, respectively, of a mobile telephone inserted into a mobile telephone holder according to an embodiment of the invention.

[0011] Referring now to FIGs. 1, 2A, 2B and 2C, there-
in are a right front perspective view, a front view, a right
side view and a rear view, respectively, of a cradle unit
of a mobile telephone holder according to an embod-
iment of the invention. Cradle unit 100 comprises right
side 104a, left side 104b, back portion 102, extension
108, securing pin 110 and front wall 114. A securing
pocket 112 is formed from the lower portions of right and
left sides, 104a and 104b, front wall 114, bottom surface
128, and a rear wall 126 comprised of the lower portion
of back portion 102. The edges of right and left sides
104a and 104b, bottom surface 128, and back portion
102 form openings 120a and 120b. Back portion 102
may include mounting hole 122. Extension 108 may in-
clude opening 124. A mounting bracket 118, including
right and left ribs 116a and 116b, respectively, may be
mounted on the rear of back portion 102. Cradle unit
100 may be formed from a single piece of material, such
as, for example, plastic.

[0012] Referring now to FIG. 3, therein is an exploded
view of a mobile telephone and holder assembly accord-
ing to an embodiment of the invention. Mobile telephone
300 comprises a main body 302 and a flip unit 304. Hold-
er 318 comprises clip 306 and cradle unit 100. Clip 306
comprises main portion 320 and spring 310 and may be
mounted on the rear of back portion 102, as shown by
arrows a and b, by sliding spring 310 into mounting
bracket 118. Clip 306 may be secured in mounting
bracket 118 by, for example, use of a rivet, bolt or other
fastening device inserted through hole 122. Mobile tel-
ephone 300 is inserted into cradle unit 100, as shown
by arrows c and d. Holder 318 may be attached to an
object, such as a belt or dashboard, by using clip 306
for carrying or holding the mobile telephone 300.

[0013] Referring now to FIGs. 4A, 4B, 4C and 4D,
therein are a first right front perspective view, a second
front right perspective view, a right side view, and a third
front right perspective view of a mobile telephone being
inserted into a mobile telephone holder according to an
embodiment of the invention. Mobile telephone 300 may
be inserted into cradle unit 100 by placing main body
302 of mobile telephone 300 into securing pocket 112
of cradle unit 100, as shown in FIG. 4A. Mobile tel-
ephone 300 may then be moved into cradle unit 100 by
moving mobile telephone 300 in the direction of arrows
e and f. Securing pin 110 is mounted on extension 108
so that securing pin 110 flexibly engages and snaps into
securing notch 312 on top rear of main body 302 of mo-
bile telephone 300, as mobile telephone 300 comes
against back portion 102 of cradle unit 100. In the em-
bodiment of the invention, the formation of opening 124
in extension 108 removes material from extension 108,
increasing the flexibility of extension 108. Also, open-
ings 120a and 120b receive respective corners of main
body 302 of mobile telephone 300, allowing a tight fit of
mobile telephone 300 in cradle unit 100 without the need
to require complicated molding techniques, if cradle unit
100 is formed from a single piece of material. Cradle unit

100 should be formed of a material flexible and resilient
enough to allow extension 108 and securing pin 110 to
flex in the backward direction and return to its original
position in order to perform the securing function. FIGs.
4B and 4C show mobile telephone 300 when fully insert-
ed into holder 318. Back portion 102, sides 104a and
104b, securing pocket 112 and securing pin 110 com-
prise the securing mechanism that holds mobile tele-
phone 300 securely in cradle unit 100. Holder 318 and
mobile telephone 300 form a single unit that is easy to
handle and that may be held in one hand. Cradle unit
100 provides a better tactual grip with which to hold mo-
bile telephone 300 than is provided by body 302 of mo-
bile telephone 300 alone. Main portion 320 of clip 306
is formed not to interfere with the gripping of holder 318
and may be formed to give added improvement in tac-
tual grip. The whole unit formed by mobile telephone
300 and holder 318 may be removed from a belt, for
example, by grasping the unit with a single hand.

[0014] Cradle unit 100 is configured to allow use of
mobile telephone 300 while in holder 318. FIG. 4D
shows how flip unit 304 of mobile telephone 300 may
be opened while in holder 318 to allow access to and
use of keyboard 316 without the need to remove mobile
telephone 300 from holder 318. The complete assembly
may then be operated while held in one hand.

[0015] In alternative embodiments, a smaller clip may
replace clip 306, or holder 318 may be mounted on an
object using alternative mounting mechanisms, such as
a tab mounted on the rear side of back portion 102 of
cradle unit 100 that snaps into an assembly mounted on
the object.

[0016] Although described in the context of particular
embodiments, it will be realized that a number of modi-
fications to these teachings may occur to one skilled in
the art. Thus, while the invention has been particularly
shown and described with respect to specific embodi-
ments thereof, it will be understood by those skilled in
the art that changes in form and shape may be made
therein without departing from the scope of the inven-
tion. Accordingly, reference should be made to the ap-
pended claim and other general statements herein rather
than to the foregoing specific description as indicating
the scope of the invention.

[0017] Furthermore, each feature disclosed in this
specification (which term includes the claims) and/or
shown in the drawings may be incorporated in the in-
vention independently of other disclosed and/or illustrat-
ed features. In this regard, the invention includes any
novel features or combination of features disclosed
herein either explicitly or any generalisation thereof ir-
respective of whether or not it relates to the claimed in-
vention or mitigates any or all of the problems ad-
dressed.

[0018] The appended abstract as filed herewith is in-
cluded in the specification by reference.

Claims

1. A holder for holding a mobile communications device, said holder comprising:
- a cradle unit including:
- a back portion, said back portion having a first end and a second end;
- a pocket, said pocket mounted on said first end of said back portion substantially perpendicular to said back portion, said pocket having a front wall and a rear wall, said pocket for receiving a first end of the mobile communication device; and
- a pin, said pin mounted on said second end of said back portion, said pin for flexibly allowing insertion of the mobile communication device into said cradle unit, coupling with said second end of the mobile communication device and securing the mobile communication device in said cradle unit.
2. The holder of claim 1, wherein said back portion further has a first and a second side extending outward from said back portion, and wherein said pocket further has a first and second side formed of said first and second side of said back portion, respectively, and said rear wall of said pocket is formed from said first end of said back portion.
3. The holder of claim 2, wherein said first and second sides of said back portion and said front wall of said pocket define an open front of said cradle unit, allowing operation of the mobile communication device while secured in the cradle unit.
4. A holder for holding a mobile communication device, said holder comprising:
- a cradle unit including:
- a back portion, said back portion having a first end and a second end and a surface;
- a pocket, said pocket mounted on said second end of said back portion, said pocket having a bottom surface extending outward from and substantially perpendicular to said surface, said pocket for receiving a first end of the mobile communication device;
- an extension, said extension having a first and a second end, wherein said second end of said extension is mounted on said first end of said back portion and angled toward said surface of
- said back portion; and
- a pin, said pin mounted on said first end of said extension and extending toward said pocket, wherein said pin allows insertion of the mobile communication device into said cradle unit, couples with a second end of the mobile communication device, and secures the mobile communication device in said cradle unit.
5. The holder of claim 4, wherein said back portion has a first and a second edge, and said bottom portion of said pocket has a first and a second edge, and wherein said cradle unit further comprises a first side and a second side, each having a first and second end, said first end of said first side attached to said first edge of said back portion and said second end of said first side attached to said first edge of said bottom portion of said pocket, and said first end of said second side attached to said second edge of said back portion, and said second end of said second side attached to said second edge of said bottom portion of said pocket.
6. The holder of claim 5, wherein said first side, first edge of said bottom portion of said pocket and said first edge of said back portion form a first opening, and wherein said second side, second edge of said bottom portion of said pocket and said second edge of said back portion form a second opening, said first and second openings for receiving a first and a second corner, respectively, of the first end of the mobile communication device.
7. The holder of any preceding claim, wherein said cradle unit is formed of a one-piece body.
8. The holder of any preceding claim, wherein said cradle unit forms a wraparound holder for the grasping of the mobile communication device during use.
9. The holder of any preceding claim, wherein said back portion further has a rear face, and said holder further comprises a clip mounted on said rear face of said back portion.
10. The holder of any preceding claim, wherein said cradle unit is formed to allow opening of a flip-type cover on the mobile communication device while secured in the cradle unit.
11. A mobile telephone and holder assembly comprising:
- a mobile telephone having a keypad and a flip type cover, said flip-type cover being moveable between an open position and a closed position, wherein said keypad is accessible for use when

said flip-type cover is in said open position and access to said keypad is blocked when said flip-type cover is in said closed position; and

a cradle unit having a pocket for receiving said mobile telephone, wherein said pocket is formed to allow movement of said flip-type cover between said first and second positions when said mobile telephone is inserted in said pocket.

12. The mobile telephone and holder assembly of claim 11, wherein said cradle unit forms a wraparound holder for grasping said mobile telephone and allows holding and operation of said mobile telephone while said mobile telephone is secured in the cradle unit.
13. The mobile telephone and holder assembly of claims 11 and 12, wherein said mobile telephone further comprises a first end and a second end, wherein said flip-type cover is disposed on said second end of said mobile telephone, and wherein said cradle unit comprises a first end, said first end of said cradle unit for receiving said first end of said mobile telephone when said mobile telephone is secured in said cradle.
14. The mobile telephone and holder assembly of claims 11 to 13, further comprising a clip for securing said cradle unit to an object

35


40

45

50

55

FIG. 1

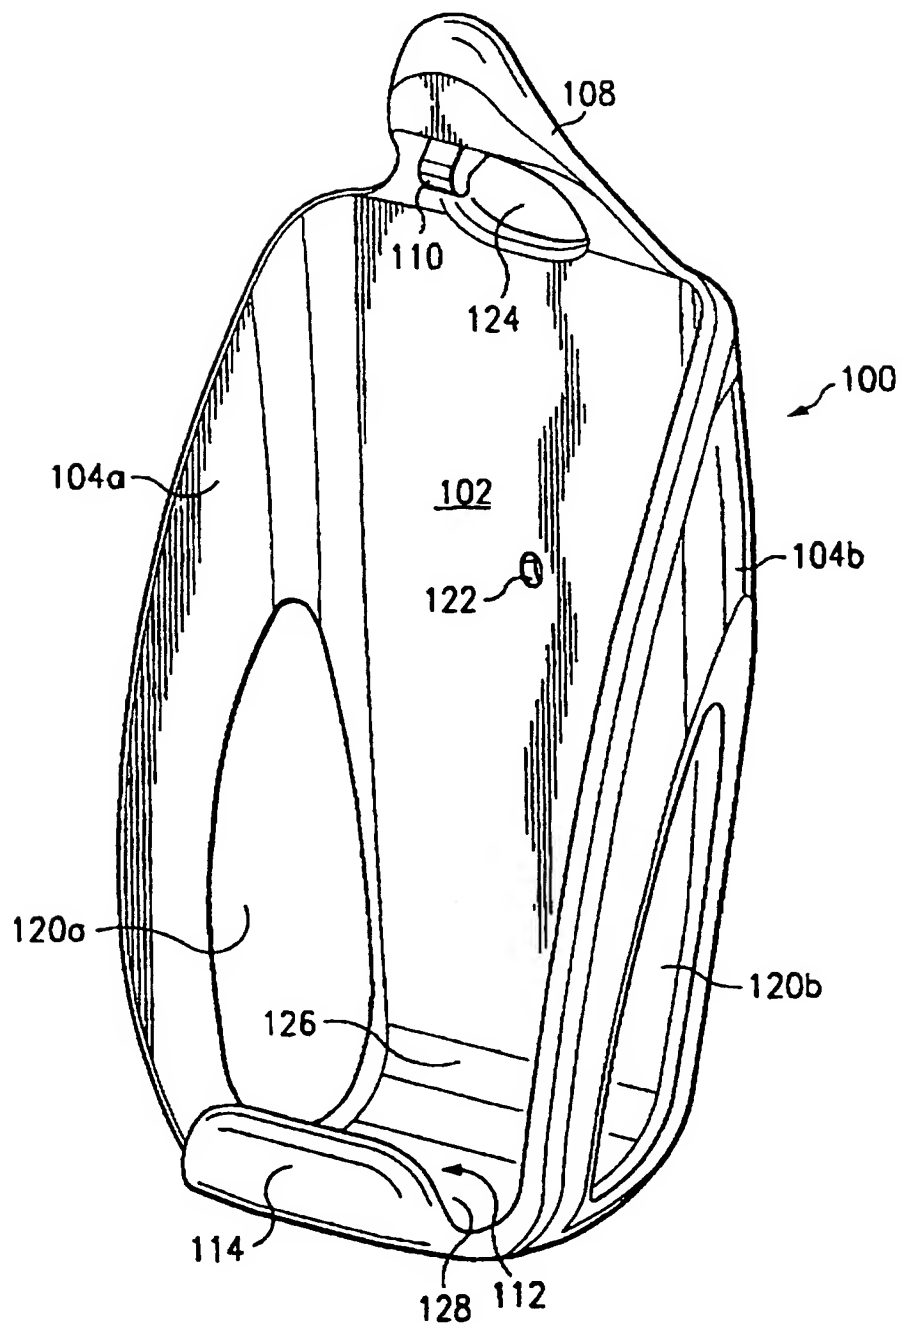

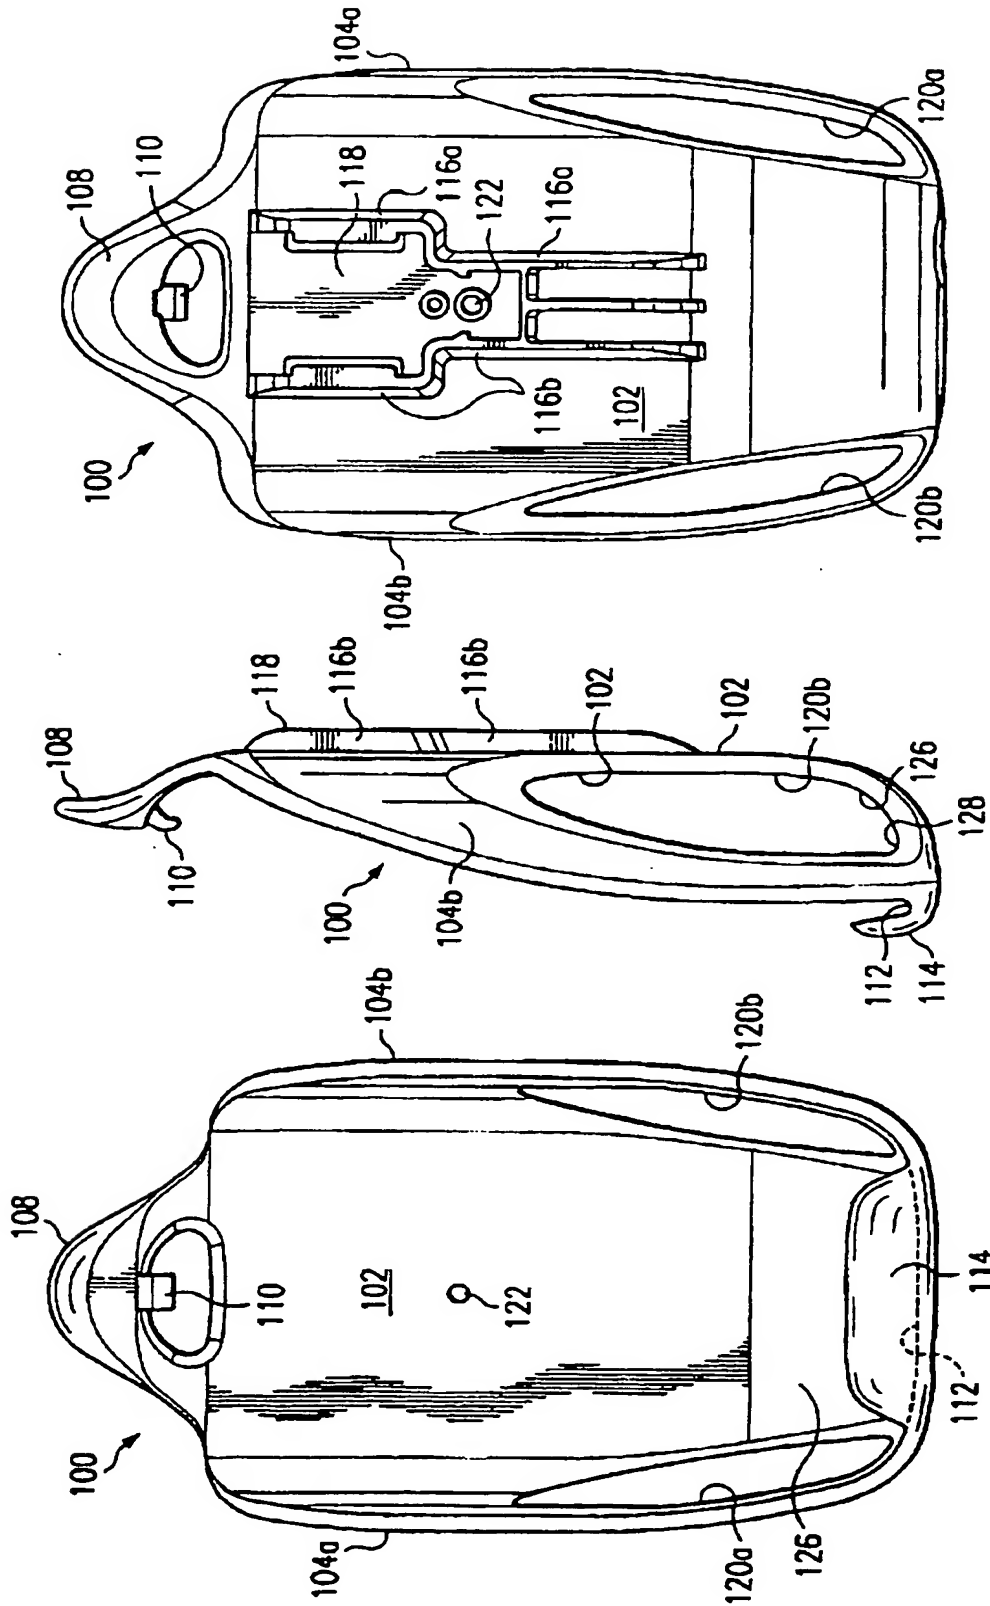


FIG. 2C

FIG. 2B

FIG. 2A

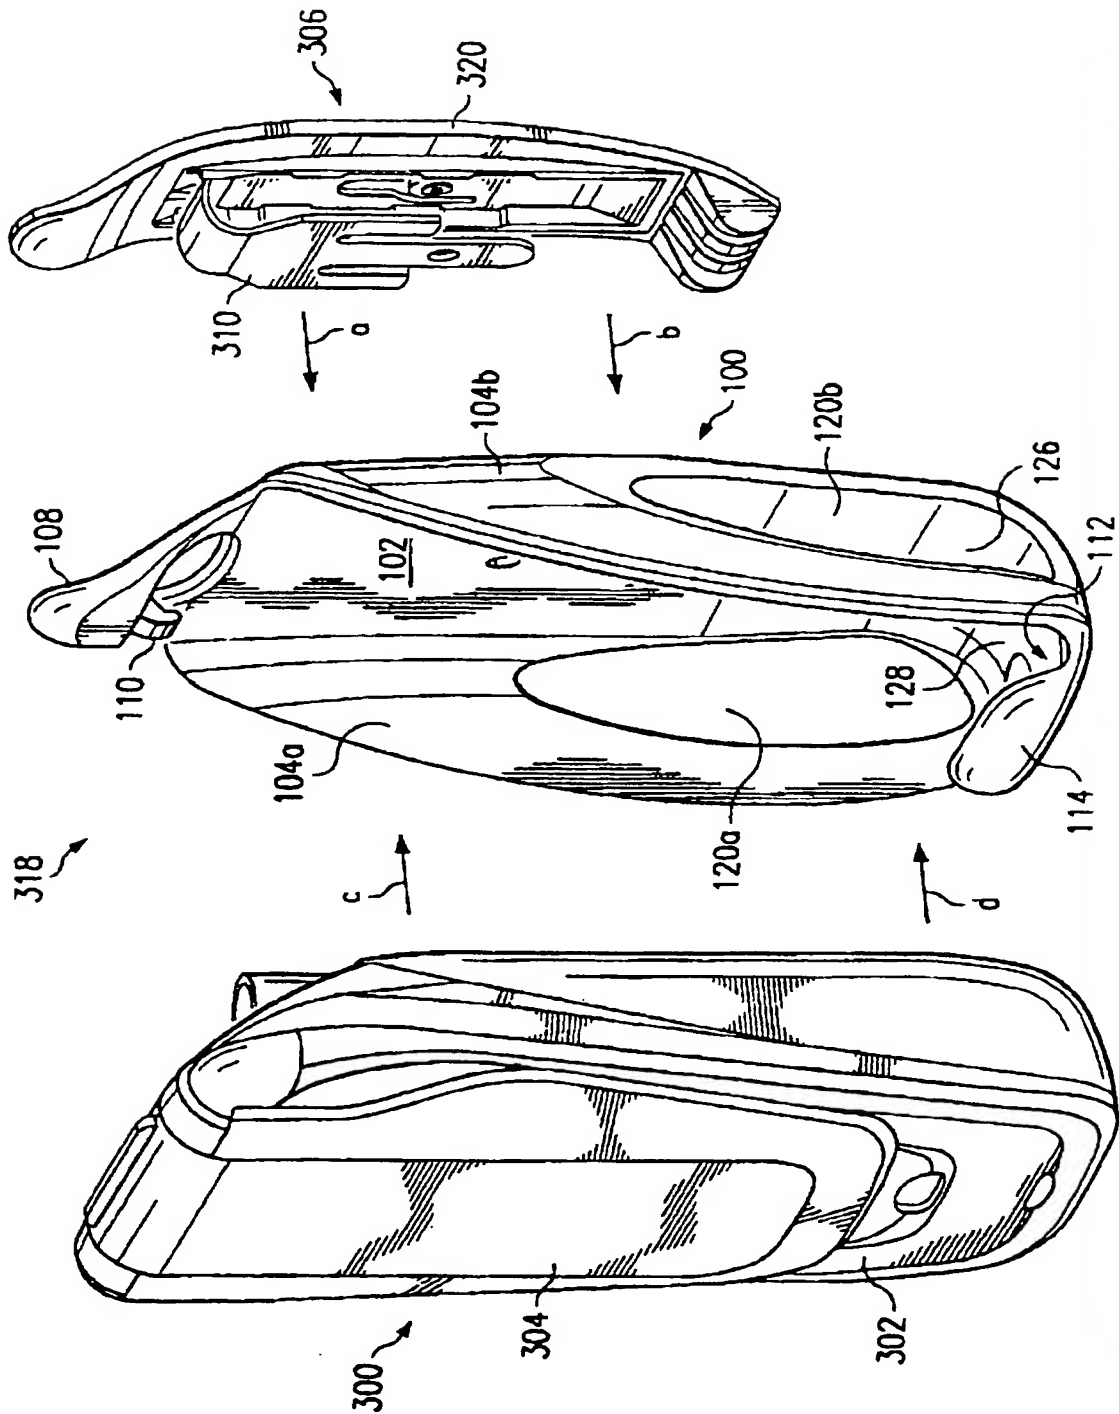


FIG. 3

100



1



FIG. 4C


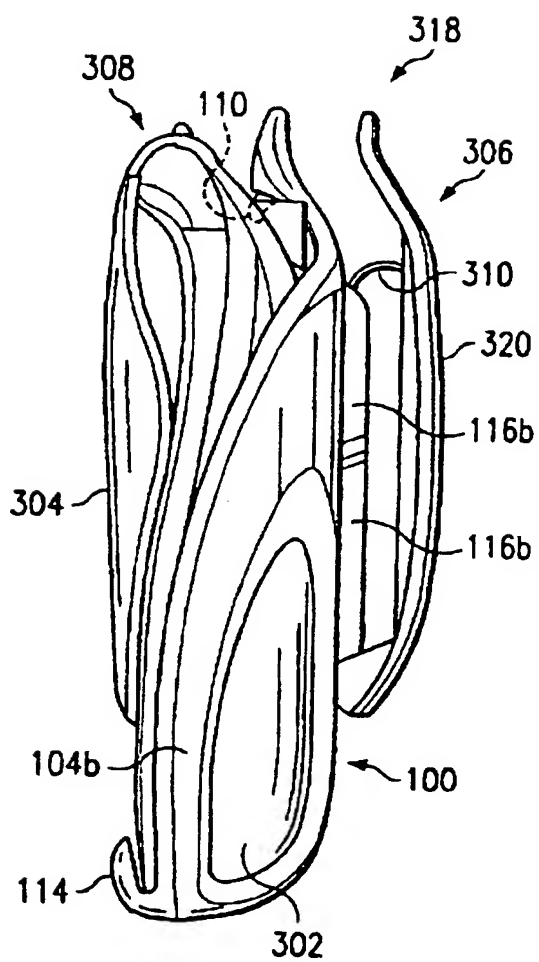


FIG. 4D



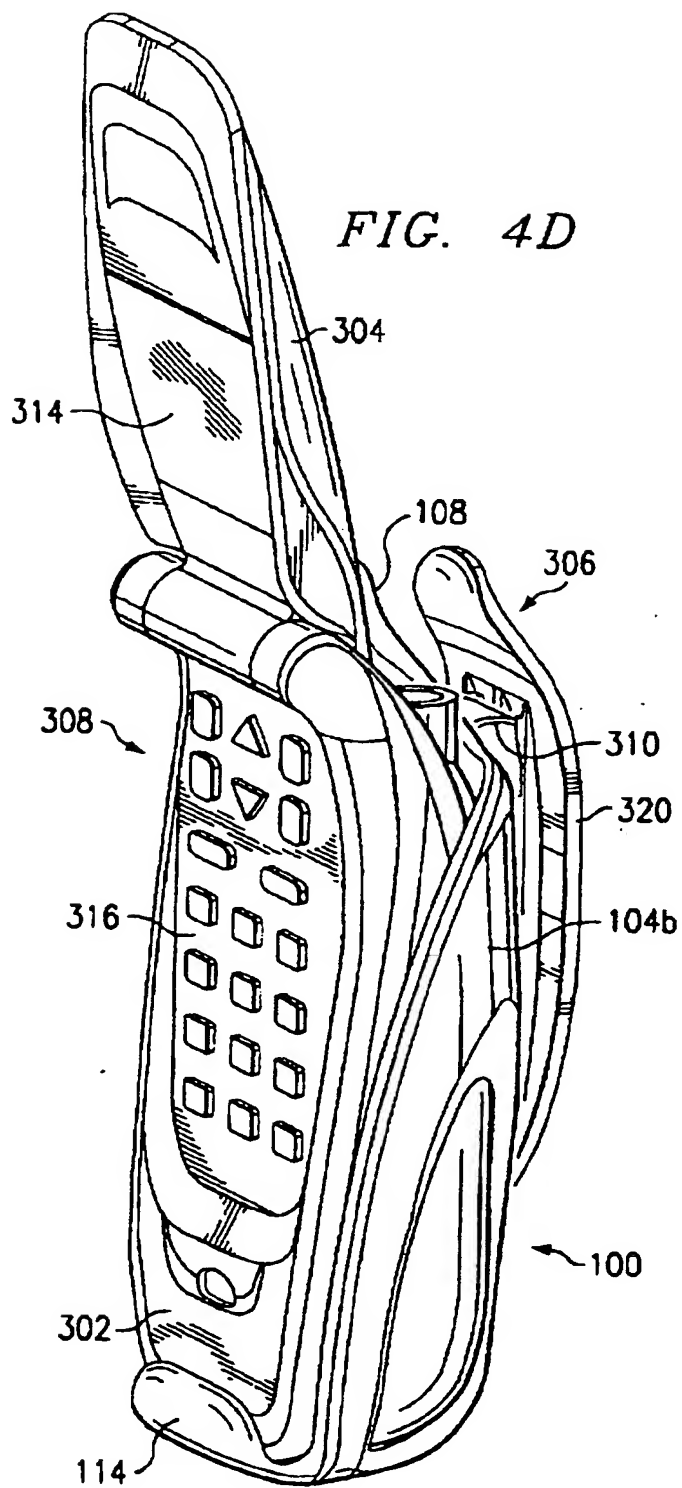

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 99 30 6537

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X A	DE 297 17 382 U (VOTRONIC ENTWICKLUNG & PROD) 18 December 1997 (1997-12-18) * figures 1-3 * * claims *	1, 4, 8 1, 2, 5-7, 9-14	B60R11/02 H04M1/04
X A	WO 98 28895 A (PHILIPS ELECTRONICS NV ; PHILIPS NORDEN AB (SE)) 2 July 1998 (1998-07-02) * figures * * abstract * * page 4, line 15 - page 7, line 6 *	1, 4, 8 2, 3, 5-7, 11-14	
X A	PATENT ABSTRACTS OF JAPAN vol. 1995, no. 08, 29 September 1995 (1995-09-29) & JP 07 135521 A (FUJITSU TEN LTD), 23 May 1995 (1995-05-23) * abstract *	1 2-5, 7, 8, 11	TECHNICAL FIELDS SEARCHED (Int.Cl.7)
P, X	PATENT ABSTRACTS OF JAPAN vol. 1999, no. 4, 30 April 1999 (1999-04-30) & JP 11 027351 A (II & AMP ; S:KK), 29 January 1999 (1999-01-29) * abstract *	1-5, 7-9	B60R
P, X	US 5 836 496 A (TSENG LICHENG ET AL) 17 November 1998 (1998-11-17) * figures * * column 1, line 45 - column 4, line 29 *	1	
P, A	EP 0 899 162 A (NOKIA MOBILE PHONES LTD) 3 March 1999 (1999-03-03) * claims; figures *	1, 4, 9	
		-/--	
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 14 December 1999	Examiner D'sylva, C
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03/82 (Pp4C01)



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 99 30 6537

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	US 5 282 246 A (YANG CHAO-MING) 25 January 1994 (1994-01-25) * figures * * abstract * * column 2, line 10 - line 65 *	1-5, 7-14	
A	DE 94 19 679 U (HAMA GMBH & CO) 2 March 1995 (1995-03-02) * claims; figures *	1-5, 7-14	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 14 December 1999	Examiner D'sylva, C
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03 82 (P4/C01)

ANNEX TO THE EUROPEAN SEARCH REPORT ON EUROPEAN PATENT APPLICATION NO.

EP 99 30 6537

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on. The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

14-12-1999

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
DE 29717382	U	18-12-1997	NONE	
WO 9828895	A	02-07-1998	CN 1212099 A EP 0895686 A	24-03-1999 10-02-1999
JP 07135521	A	23-05-1995	NONE	
JP 11027351	A	29-01-1999	NONE	
US 5836496	A	17-11-1998	NONE	
EP 0899162	A	03-03-1999	GB 2328830 A	03-03-1999
US 5282246	A	25-01-1994	NONE	
DE 9419679	U	02-03-1995	DE 19538249 A	13-06-1996

EPO FORM P0458

For more details about this annex : see Official Journal of the European Patent Office, No 12/82

THIS PAGE BLANK (USPTO)